


OPTIGRÜN FSA 40

Inspection Chamber

Inspection chamber for the revision of roof outlets.
Can be used in the roof area and in the edge area.

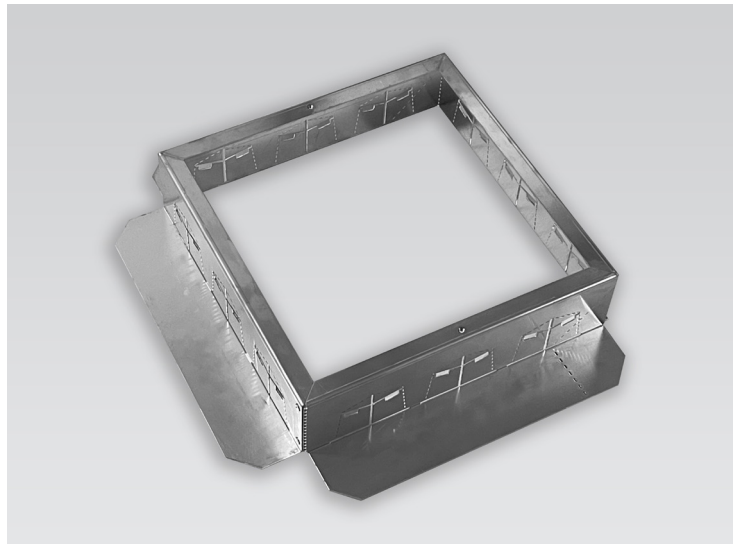

Material	Aluminium
Colour	Aluminium natural
Material thickness	2 mm
Dimensions	L 400 x W 400 x H 100 mm Floor area: L 560 x W 490 mm can be raised in 50 mm and 100 mm increments
Quantity/delivery unit	Chamber base part without cover
Delivery form	according to size of order by parcel shipment or by forwarding agent
Pack size	according to size of order
Delivery weight	approx. 1.4 kg/piece

Area of use

- Inspection chamber above roof outlets and parapet outlets of green roofs
- Can also be used in terrace areas (walked on by pedestrians) with a suitable cover
- For the revision of the roof outlet

Specific properties

- Connection options for 8 Optigrün Water Conduction Channels WKA or 12 Optigrün Water Conduction Channels WKK
- Suitable for use in edge areas, with pre-perforated insulation wedge profile
- With rivet nuts for fastening further chamber components
- Insensitive to humic acids
- Combination with different covers possible, load capacity depending on the selected cover
- Further accessories available separately

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigrün's technical knowledge at the time of publication. Optigrün reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19,
72505 Krauchenwies-Göggingen
Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigreen Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East
Welwyn Garden City (Herts), AL7 1HL
Phone +44 203 5899400, Fax +44 207 1171664, info@optigreen.co.uk

