
OPTIGRÜN DSA 37I

Inspection Chamber Cover

Inspection chamber cover for Optigrün Inspection Chamber FSK 37.

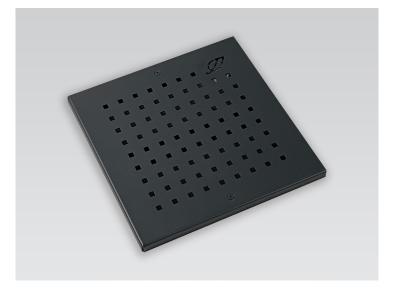

Material	Aluminium, coated
Colour	Anthracite (RAL 7016)
Material thickness	3 mm
Dimensions	L 378 x W 378 mm
Load capacity	400 kg
Slip resistance class	R11
Quantity/delivery unit	Inspection chamber cover incl. fastening material
Delivery form	according to size of order by parcel shipment or by forwarding agent
Pack size	according to size of order
Delivery weight	approx. 1.5 kg/piece

Area of use

- For covering the Optigrün Inspection Chamber FSK 37
- In extensive and intensive green roof areas

Specific properties

- With inlet openings
- With Anti-slip coating
- With fold-over edge and reinforced on the underside
- Countersunk screws
- Easy revision
- Not suitable for traffic areas
- Available in custom colours (at an additional charge)

Datasheet Item No. 31912 DSA 37I Last Update 19.01.2024

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigrün's technical knowledge at the time of publication. Optigrün reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19. 72505 Krauchenwies-Göggingen

Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigreen Limited (Service UK only) Suite G5 Albany Chambers, 26 Bridge Road East

Welwyn Garden City (Herts), AL7 1HL

