


OPTIGRÜN RSA 25

Edge Inspection Chamber

Inspection chamber for the revision of roof outlets in the edge area.

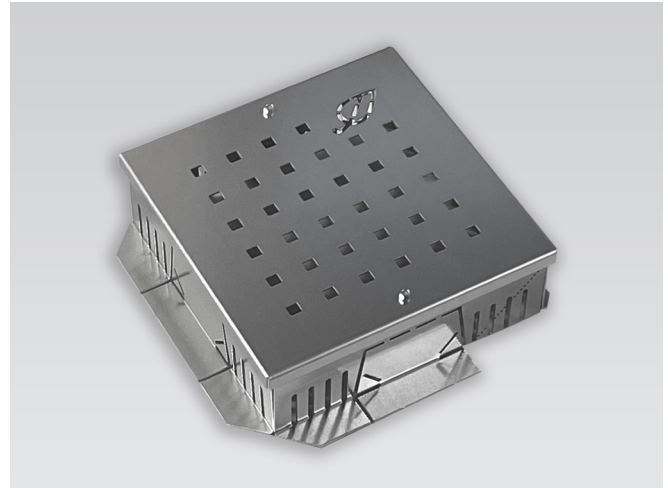

Material	Aluminium
Colour	Aluminium natural
Material thickness	1.5 mm
Dimensions	L 250 x W 2500 x H 80 mm Floor area: L 310 x W 280 mm can be raised in 50 mm and 100 mm increments
Delivery form	Chamber base part with cover incl. fastening material
Delivery form	according to size of order by parcel shipment or by forwarding agent
Pack size	according to size of order
Delivery weight	approx. 1.5 kg/piece

Area of use

- Inspection chamber above roof outlets in the edge area of green roofs
- Directly in front of rising building components and on insulation wedges
- For the revision of the roof outlet

Specific properties

- Connection options for 3 Optigrün Water Conduction Channels WKK
- Suitable for use in edge areas, with pre-perforated insulation wedge profile
- Cover with inlet openings
- Insensitive to humic acids

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigrün's technical knowledge at the time of publication. Optigrün reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19,
72505 Krauchenwies-Göggingen
Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigrün Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East
Welwyn Garden City (Herts), AL7 1HL
Phone +44 203 5899400, Fax +44 207 1171664, info@optigruen.co.uk

